


MELCON Electronic Ballast for T-8 Lamps

Active power factor corrector with constant wattage.

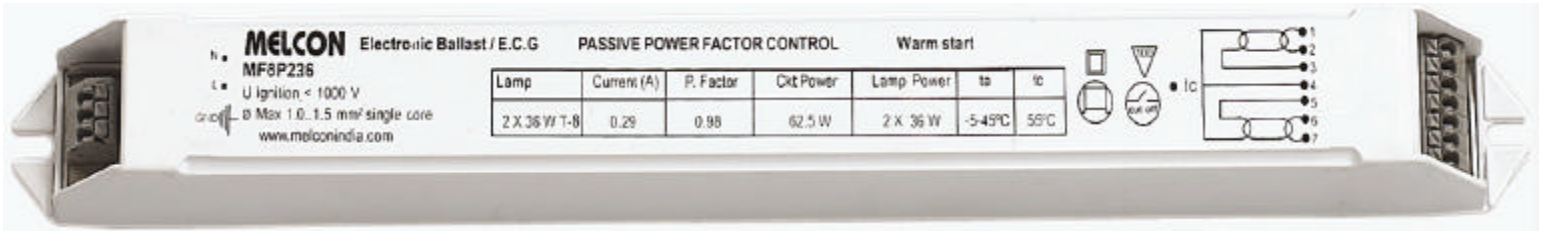

1- 2 Lamp Electronic Ballast for FTL and Compact Fluorescent Lamps.

Model No:	MF8A118/136-MF8P118/136	MF8A218/236-MF8P218/236
Lamp type	T-8 / PLL	T-8 / PLL
Lamp Circuit	--	Parallel Lamp operation
Rated Voltage	220~240Vac 0/50/60 Hz.	
Operating freq.	30~42 KHz.	
Protection	II / with Functional Earth terminal	
Operating temperature	-15°C to +50°C	
Lamp start	Lamp Warm start	

: FEATURES:

- Digital controlled and fixed pre-heat-time also at different ambient temperatures
- Security cut-off at the end of the lamp life
- Constant luminous intensity at mains voltage between 145V-265Vac & 198V-260Vdc
- Flicker-free forced lamp warm start
- Safety function by protection circuitry.
- Automatically restart after lamp-change
- Designed with respect to European & international standards.

